

Product Informations

Updated: 12/02/2022

HF adhesive label, transparent wet in-lay version, size mm.40x20, standard adhesive, OFF metal use.

Services available for custom printing and coding

Option: Black or CMYK colors printing, barcode / QR / Logos - User memory encoding - Special packaging - Custom label dimensions

Variants: Versions on request in PRINTABLE PAPER or PET or with 3M special ADHESIVES

Electrical Tag features:	Frequency	Reading distance	Chip Type	EPC-UID	User Memory
HF	13,56 MHz	Up to 1-8 Cm.	ICODE SLIX	7 Byte	896 bits-112 Byte
	ISO standard 15693 /18000-3M1 (NFC T5T)	Operating temp.C° -40/+85 °C	Storage temp.C° -50/+125 °C	EPC Access-pass ND	Data Retent. 50 years

Optional Chip: ICode SLIX, Icode SLIX_2

Label Physical features

Antenna of Tag

Size Label mm

40x20

Surface Material

Transparent PET

Adhesive

Standard Adhesive

Mounting

OFF Metal

Size Antenna mm.


26X12



Standard Packaging

Cross-Section Label


"L" Width	40 mm.
"A" Height	20 mm.
"Step"	mm.
Liner	mm.



single-row roll

Pcs
Roll:
Outer
Diam. mm
Internal
Diam. mm

76

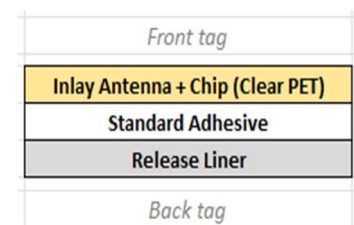

Packaging Notes: