

Product Informations

Updated: 08/02/2022

NFC adhesive label, transparent wet in-lay version, size mm.50x50, standard adhesive, OFF metal use.

Adhesive NFC tag, readable / writable with any NFC Smartphone. Services available for custom printing and coding

Option: Black or CMYK colors printing, barcode / QR / Logos - User memory encoding - Special packaging - Custom label dimensions

Variants: Versions on request in PRINTABLE PAPER or PET or with 3M special ADHESIVES

Electrical Tag features:	Frequency	Reading distance	Chip Type	EPC-UID	User Memory
NFC	13,56 MHz	Up to 1-8 Cm.	Ntag 213	7 Byte	
	ISO standard 14443A 1-3 (NFC T2T)	Operating temp.C° -25/+70 °C	Storage temp.C° -50/+125 °C	EPC Access-pass PWD 32 bits	Data Retent. 10 years

Optional Chip: Ntag 213, Ntag 216, Mifare Ultralight Ev1, Mifare Classic 1K

Label Physical features

Antenna of Tag

Size Label mm

50x50

Surface Material

Transparent PET

Adhesive


Standard Adhesive

Mounting

OFF Metal


Size Antenna mm.

40X40



Standard Packaging

"L" Width	50 mm.
"A" Height	50 mm.
"Step"	mm.
Liner	mm.




single-row roll

Pcs
Roll:
Outer
Diam. mm
Internal
Diam. mm

76

Cross-Section Label

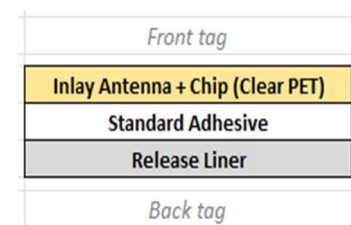

Packaging Notes: